



### PW-K3G/R/Y/W Emergency Break Glass

#### Features:

- » SPDT Call Point – NO/NC/COM
- » Four Colors - Customization available (MOQ Apply)

### Emergency Door Release



### PW-K4G Resettable Emergency Break Glass

#### Features:

- » Fire Alarm Exit – Emergency Door release with LED / Buzzer
- » Double Channel – NO/NC/COM



**PW-B02A**

### Emergency Door Release


#### Overview:

Exit Button is designed to provide a reliable means of ingress/egress for access controlled openings in commercial and industrial facilities. The heavy duty stainless steel faceplate is designed to mount, depending on the model, into a single gang or narrow jamb electrical box.

#### Specifications:

Material	Stainless Steel
Momentary	Double Pole Double Throw
Max. Rating	5A, 125/250VAC
Operating Life	Over 100000 Times
Operating Travel	2.7 mm
Dimension	85.5 X 85.5 mm
Weight	0.13 kg

#### Diagram

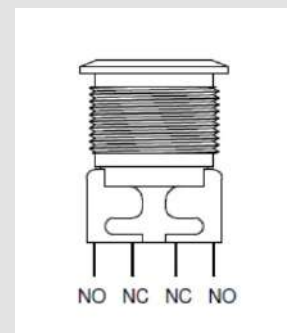


#### Features:

- » No Power Required To Operate
- » Vandal Resistant
- » Stainless Steel Faceplate
- » N.O. & N.C. Output



### PW-S01A Emergency Door Release

#### Diagram

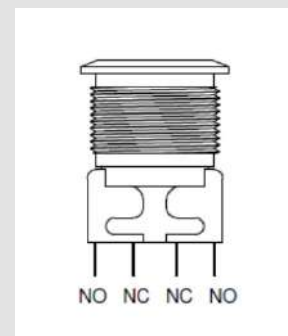

#### Overview:

Exit Button is designed to provide a reliable means of ingress/egress for access controlled openings in commercial and industrial facilities. The heavy duty stainless steel faceplate is designed to mount, depending on the model, into a single gang or narrow jamb electrical box.

#### Specifications:

Material	Stainless Steel
Momentary	Double Pole Double Throw
Max. Rating	5A, 125/250VAC
Operating Life	Over 100000 Times
Operating Travel	2.7 mm
Dimension	84.5 X 39.5 mm
Weight	0.1 kg


#### Features:

- » No Power Required To Operate
- » Vandal Resistant
- » Stainless Steel Faceplate
- » N.O. & N.C. Output



### PWSB8 Emergency Door Release

#### Diagram

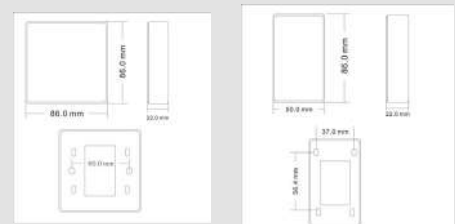

#### Overview:

PWSB8-Squ/Rct touch button is surface amount with blue and green LED lights. The dimension is 86(L)\*50(W)\*20(H) mm and 86(L)\*50(W)\*20(H) mm It is suitable for hollow doors; it is elegant style with long time usage

#### Specifications:

Dimension	86L*86W*20H (mm)/ 86(L)*50(W)*20(H) mm
Current	3A@12-24VDC
Output Contact	NO/NC/COM
Optional Accessories	M86; M50
Mechanical Life	500,000 tested
Operating Temperature	-20 - 55°C (14-131F)
Operating Humidity	0-95% (non-condensing)
Weight	0.12kg/ 0.1kg
Packing Quantity (PCS/CTN)	100pcs/ctn
Package Size	51*45*24cm
Gross Weight	3kg/ 11kg



**PW-38T/C**  
**MAGNETIC**  
**CONTACT- BROWN**

### Overview:

Perfect for all small application screw mount/ self adhesive reed switch contact over 18mm gap.

### Specifications:

Operating distance	18mm+5mm
Switch withstood voltage	100vDC
Load Current :	500mA
Switch output	NC
Dimension	27mm x 14mm
Color	Brown


## MAGNETIC DOOR POSITION SWITCH



**PW- SDC-52**



**PW-36**  
DPS - Concealed Type

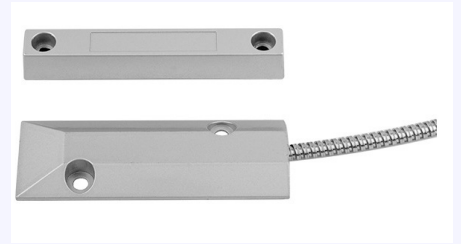

**PW-55**  
DPS - Surface mount type

## DOOR RELEASE KEY SWITCH - METAL



**PW-53E**  
Metal Key Switch



**PW-4E**  
Slim type



**PW-2RE**  
Metal Key Switch



**PW-4HE**

## ALARM SIREN



**PW-103 -**  
Wired Indoor  
Siren with Flash



**PW-820**  
80dB Indoor  
Siren

